


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

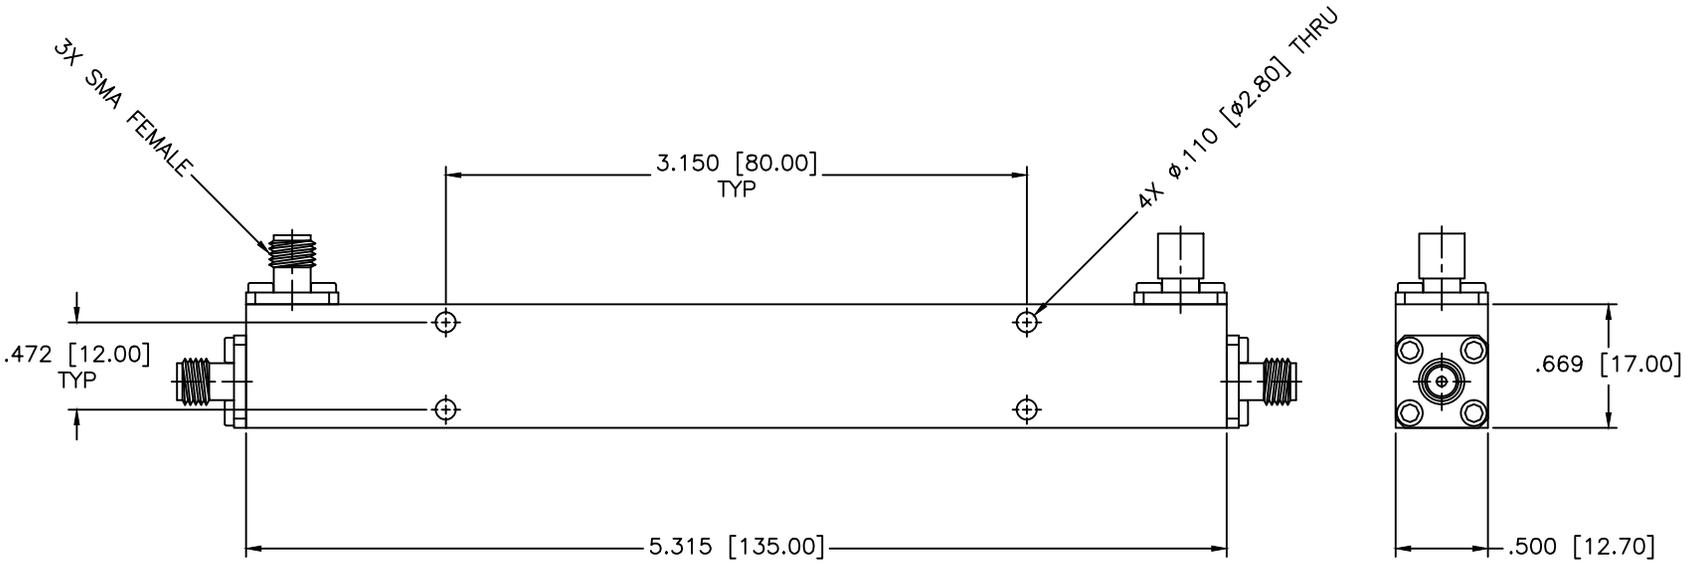

SPECIFICATIONS

- Frequency Range: 0.4–20 GHz
- VSWR: 1.50:1 Max.
- Coupling: 10±1.0dB
- Insertion Loss: 1.9dB Max.
- Directivity: 14dB Min.
- Frequency Sensitivity: ±0.8dB
- Power Handling: 30 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	DRAWING TITLE: DIRECTIONAL COUPLER	
DRAWN: Paiboon Luekhamhan		DATE: 8-21-2020	PART NO. CB94-10	
APPROVED: T. Nguyen		DATE: 8-21-2020	CAGE CODE: OD2L5	SIZE: N/A REV: A DWG NO.: 86558
		THIRD ANGLE PROJECTION 	DO NOT SCALE THE DRAWING	