REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

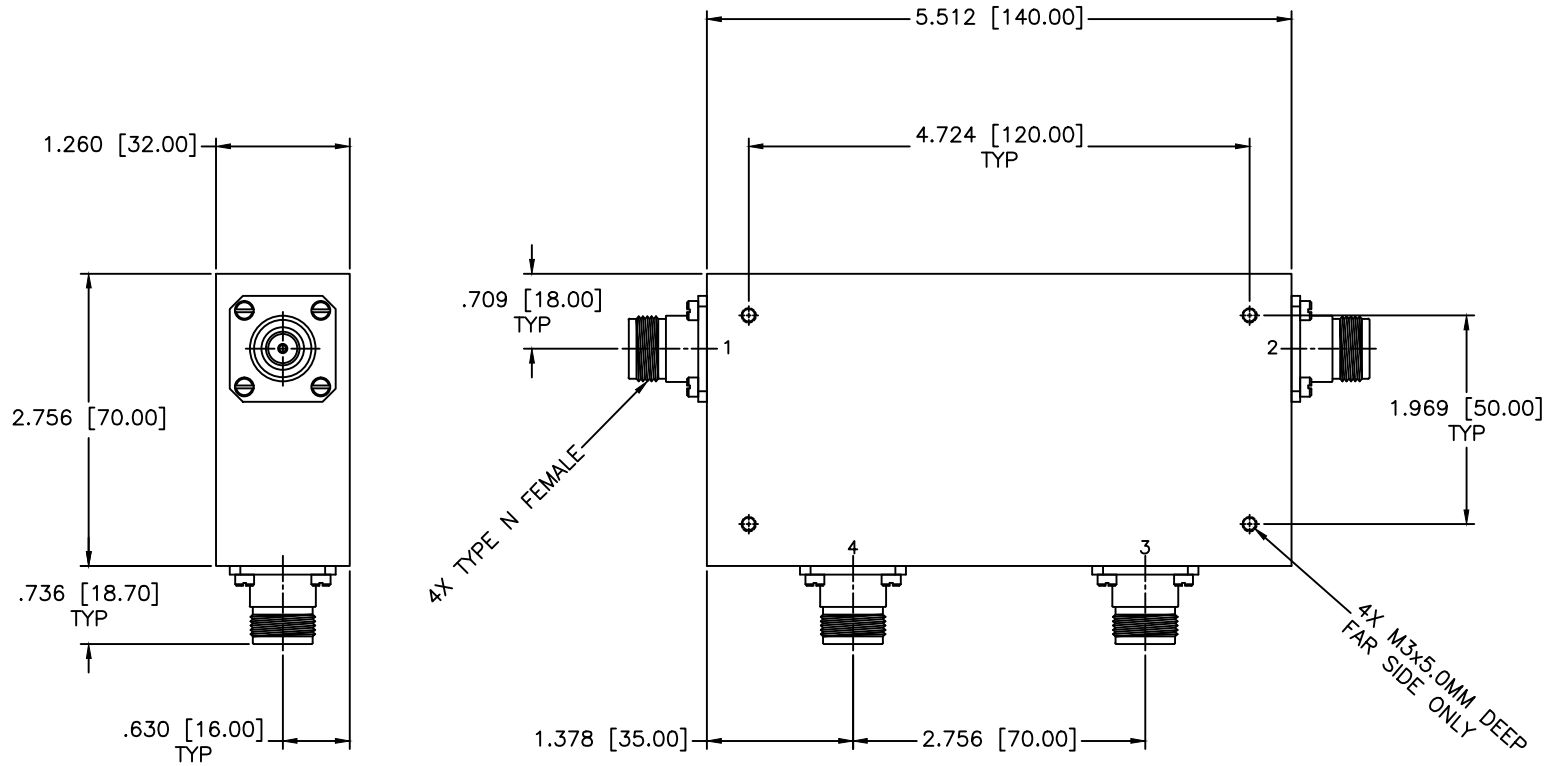

Freq. Range (MHz)	Insertion Loss (dB) Max.		Isolation (dB) Min.		VSWR Max.	Power Fwd/Rev CW (W)	Temperature Range, °C
	1–2 3–4	2–3	2–1 4–3	1–3, 3–1 2–4, 4–2			
136–174	1.2	0.6	34	17	1.35	50/50	0 to +50

MATERIAL:

DRAWN: Paiboon DATE: 08-02-2024

APPROVED: T. Nguyen DATE: 08-02-2024

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.02 ±.015
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

SCALE: N/A
SHEET: N/A

DRAWING TITLE: DUAL JUNCTION CIRCULATOR

PART NO. CSJ-36

CAGE CODE: 0D2L5

SIZE: N/A REV: N/A

DO NOT SCALE THE DRAWING

DWG NO. 87305