


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

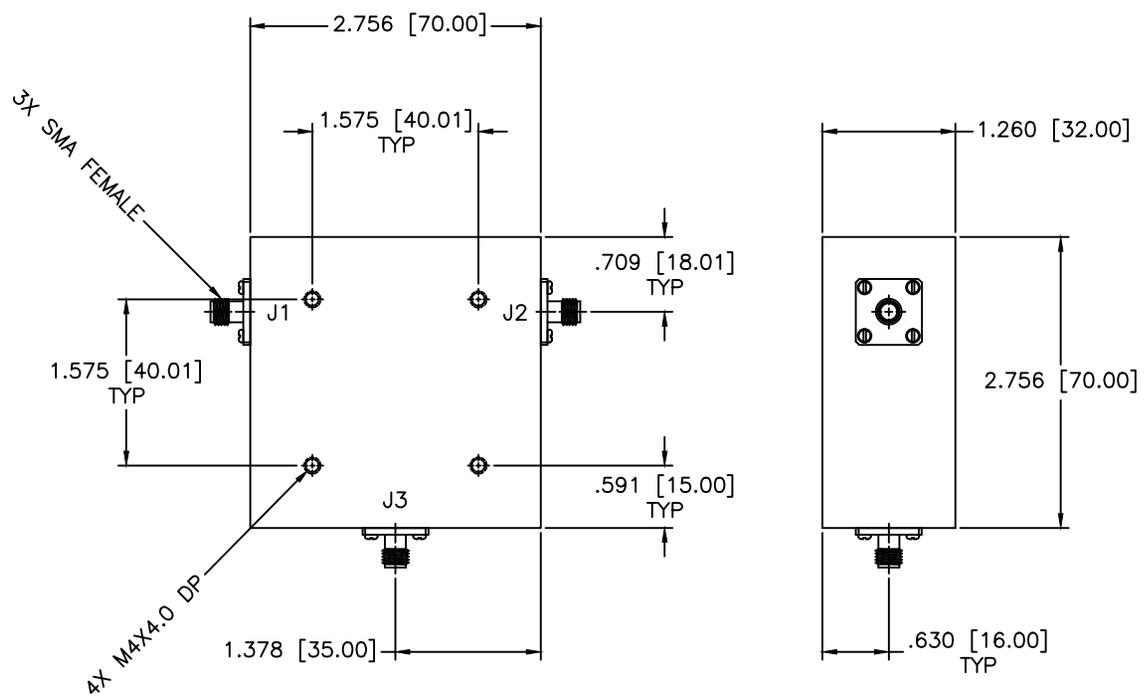

SPECIFICATIONS

Frequency Range: 88–108 MHz
 Reverse Isolation: 18dB Min.
 Insertion loss: 1.0dB Max.
 VSWR: 1.30:1 Max.
 Forward Power: 50W AVG.
 Operating Temperature: -10°C to +60°C

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-8118 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .02 ± .015 ANGLE: ± 1/2°		DRAWING TITLE:		LUMPED ELEMENT COAXIAL CIRCULATOR		SHEET: N/A
DRAWING: Paiboon		DATE: 05-14-2024		PART NO. CSL-28		
APPROVED: T. Nguyen		DATE: 05-14-2024		CAGE CODE: OD2L5		SIZE: N/A
				REV: N/A		DWG NO. 87118
				DO NOT SCALE THE DRAWING		