


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

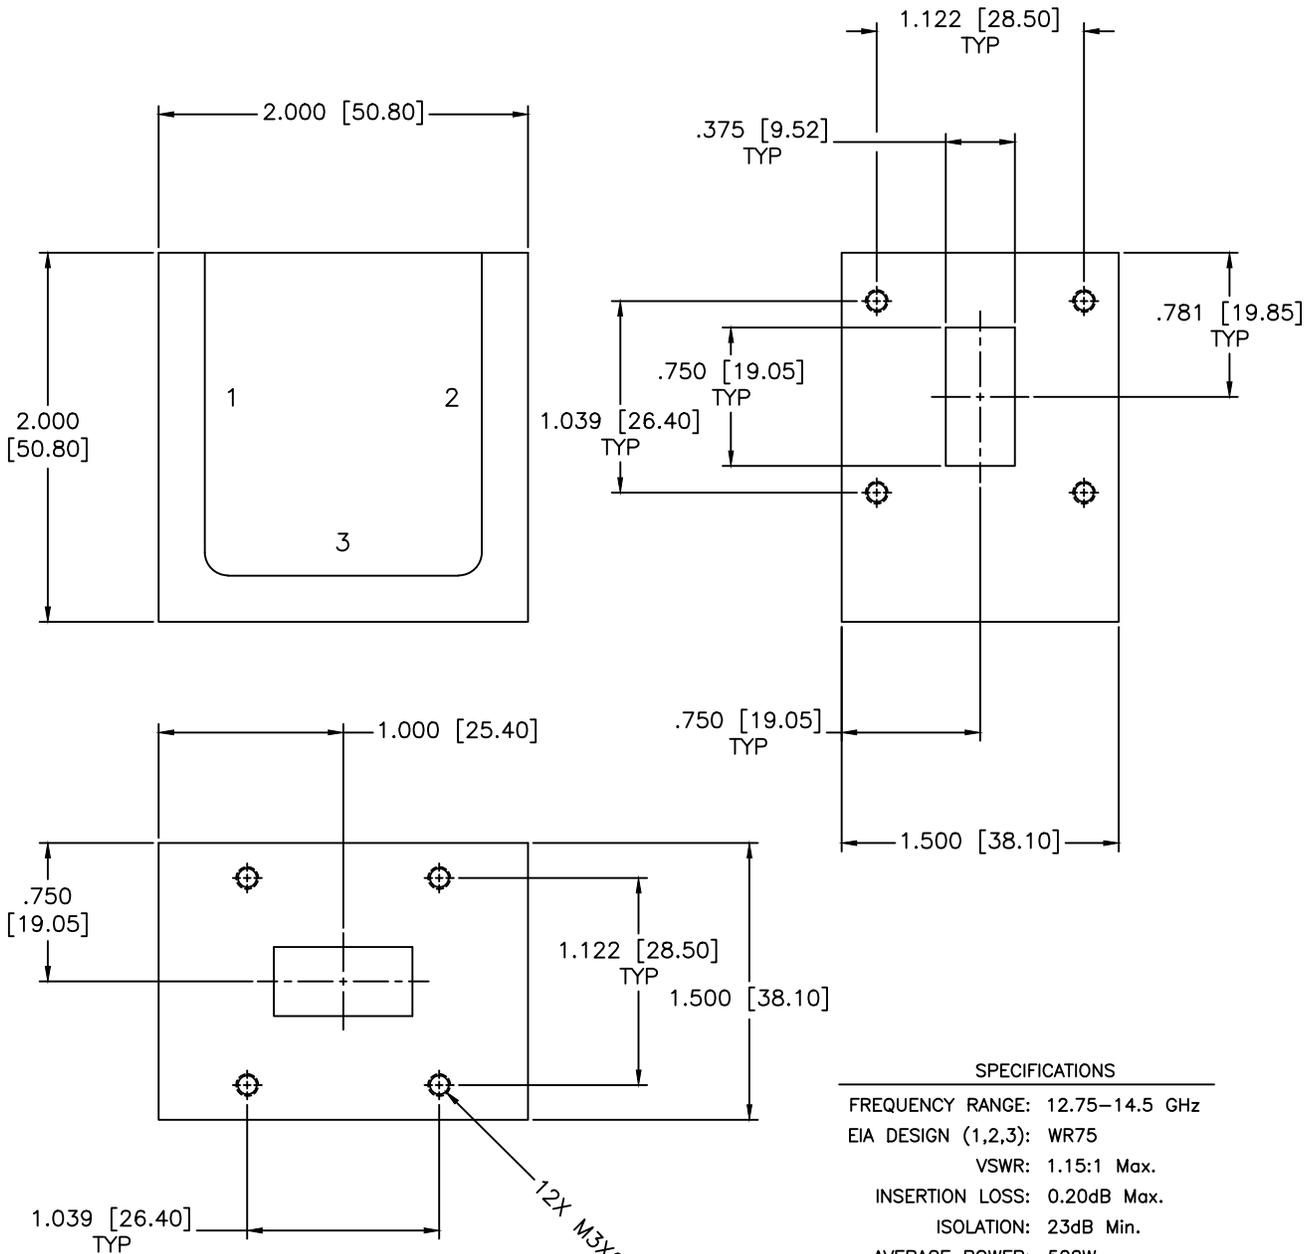

SPECIFICATIONS

FREQUENCY RANGE: 12.75–14.5 GHz
 EIA DESIGN (1,2,3): WR75
 VSWR: 1.15:1 Max.
 INSERTION LOSS: 0.20dB Max.
 ISOLATION: 23dB Min.
 AVERAGE POWER: 500W
 OPERATING TEMPERATURE: -40°C to +90°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
					SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: WR75 WAVEGUIDE CIRCULATOR				
DRAWN: Paiboon Luekhamhan		DATE: 12-06-2011		PART NO. CSW-29		
APPROVED: T. Nguyen		DATE: 12-06-2011		CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 85948	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		THIRD ANGLE PROJECTION 				
DO NOT SCALE THE DRAWING						