


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

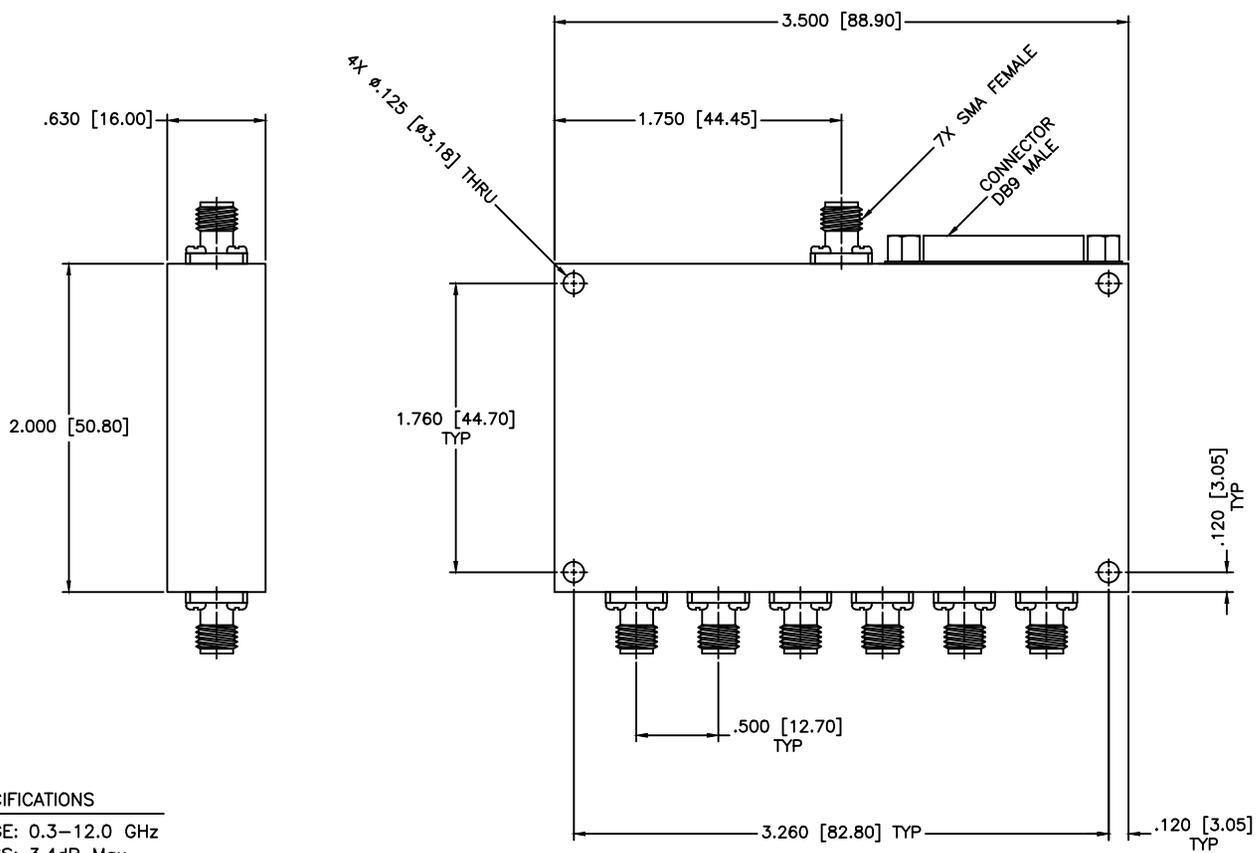

- ITT CANNON 9-PINS
- Pin 1 = J1 (Control)
 - Pin 2 = J2
 - Pin 3 = J3
 - Pin 4 = J4
 - Pin 5 = J5
 - Pin 6 = J6
 - Pin 7 = GND
 - Pin 8 = +5V
 - Pin 9 = -5V

SPECIFICATIONS

FREQUENCY RANGE: 0.3-12.0 GHz
 INSERTION LOSS: 3.4dB Max.
 ISOLATION: 60dB Min.
 VSWR: 2.00:1 Max.
 INPUT POWER: 200 mW (23 dBm)
 SWITCHING TIME: 100 nSEC

Drivers: Schottky TTL
 Voltage/Current Required:
 +5 Vdc @ +100 mA, Typical
 -5 Vdc @ -40 mA, Typical
 Higher speeds available.
 Individual TTL Control Logic:
 "0" (-0.3V to +0.8V) = ON
 "1" (+2.0V to +5.0V) = OFF

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.01 ± 0.005 ANGLE: ± 1/2°		DRAWING TITLE:	SP6T PIN DIODE SWITCHES, REFLECTIVE
DRAWN:		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.:	D6-19/REF	
APPROVED:		THIRD ANGLE PROJECTION 		CAGE CODE:	SIZE:	REV:
Paiboon Luekhamhan		DATE: 08-16-2011		OD2L5	A	N/A
T. Nguyen		DATE: 08-16-2011		DO NOT SCALE THE DRAWING		DWG NO. 85823