


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

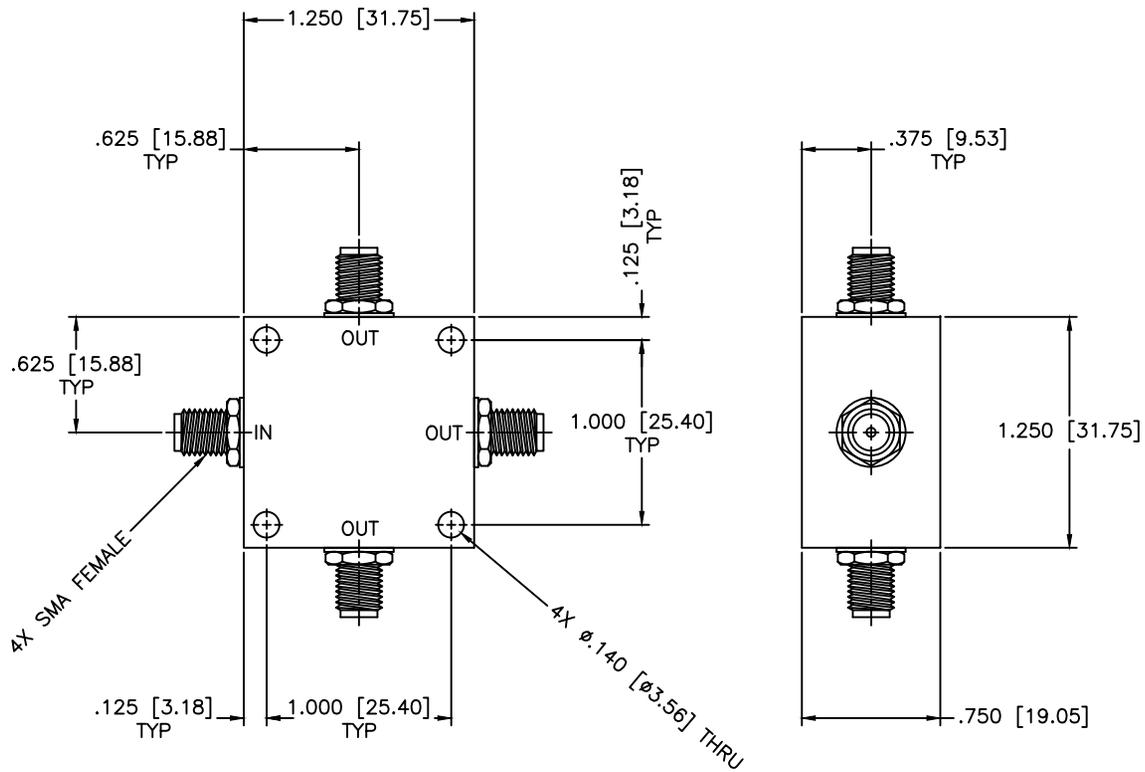

**SPECIFICATIONS**

Frequency Range: 0.20–20 MHz  
 Insertion Loss: 0.3dB Max.  
 Isolation: 25dB Min.  
 VSWR: 1.20:1 Max.  
 Amplitude Balance: ±0.2dB Max.  
 Phase Balance: ±2.0° Max.  
 Input Power: 1 Watt Max.

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://WWW.MCLI.COM">http://WWW.MCLI.COM</a>	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>3-WAY POWER DIVIDER</b>	
DRAWN: Paiboon Luekhamhan		PART NO. <b>PL3-32</b>	
DATE: 04-03-2024	APPROVED: T. Nguyen	CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO. 87012
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING	