


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

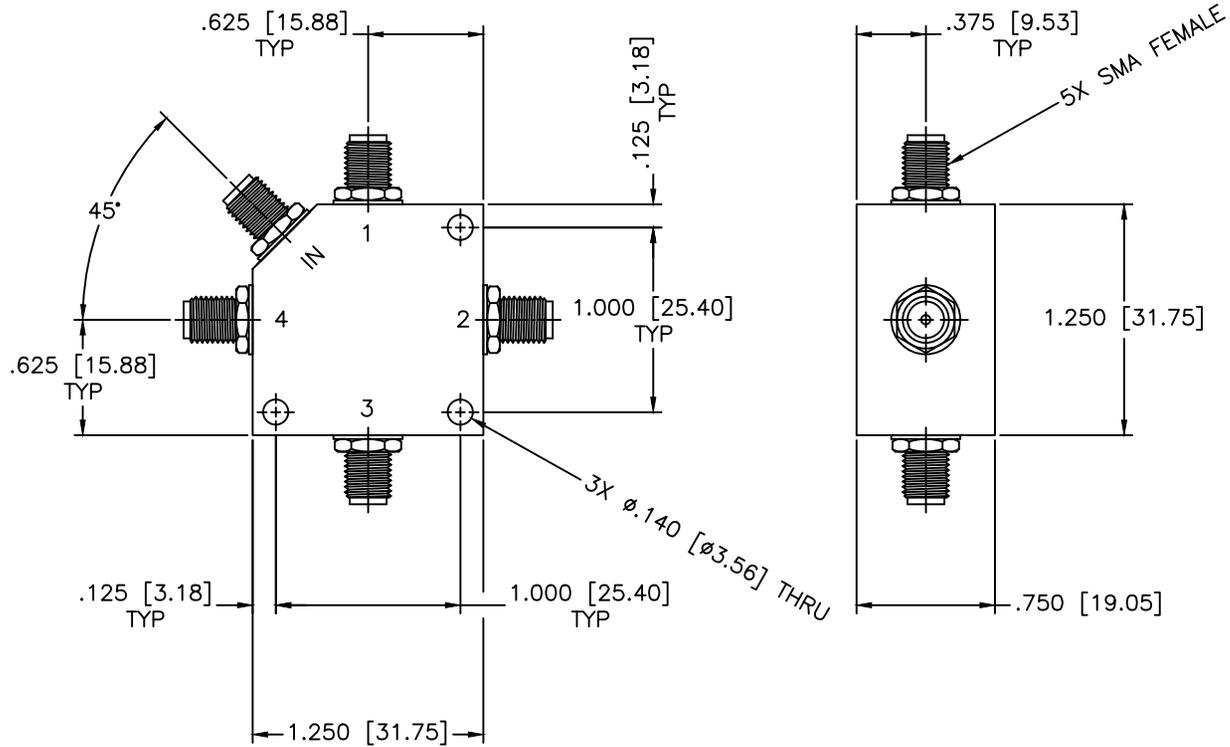

**SPECIFICATIONS**

Frequency Range: 0.3–60 MHz  
 Isolation: 25dB Min.  
 Insertion Loss: 1.0dB Max.  
 Amplitude Balance: ±0.2dB Max.  
 Phase Balance: ±2 Deg. Max.  
 VSWR: 1.30:1 Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	4-WAY POWER DIVIDER
DRAWN:		DATE:		PART NO.		PL4-26
Pai boon Luekhamhan		07-26-2018		CAGE CODE:		
APPROVED:		DATE:		SIZE:		86768
T. Nguyen		07-26-2018		A		
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		REV:		N/A
		THIRD ANGLE PROJECTION 		DWG NO.		
				OD2L5		DO NOT SCALE THE DRAWING