


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

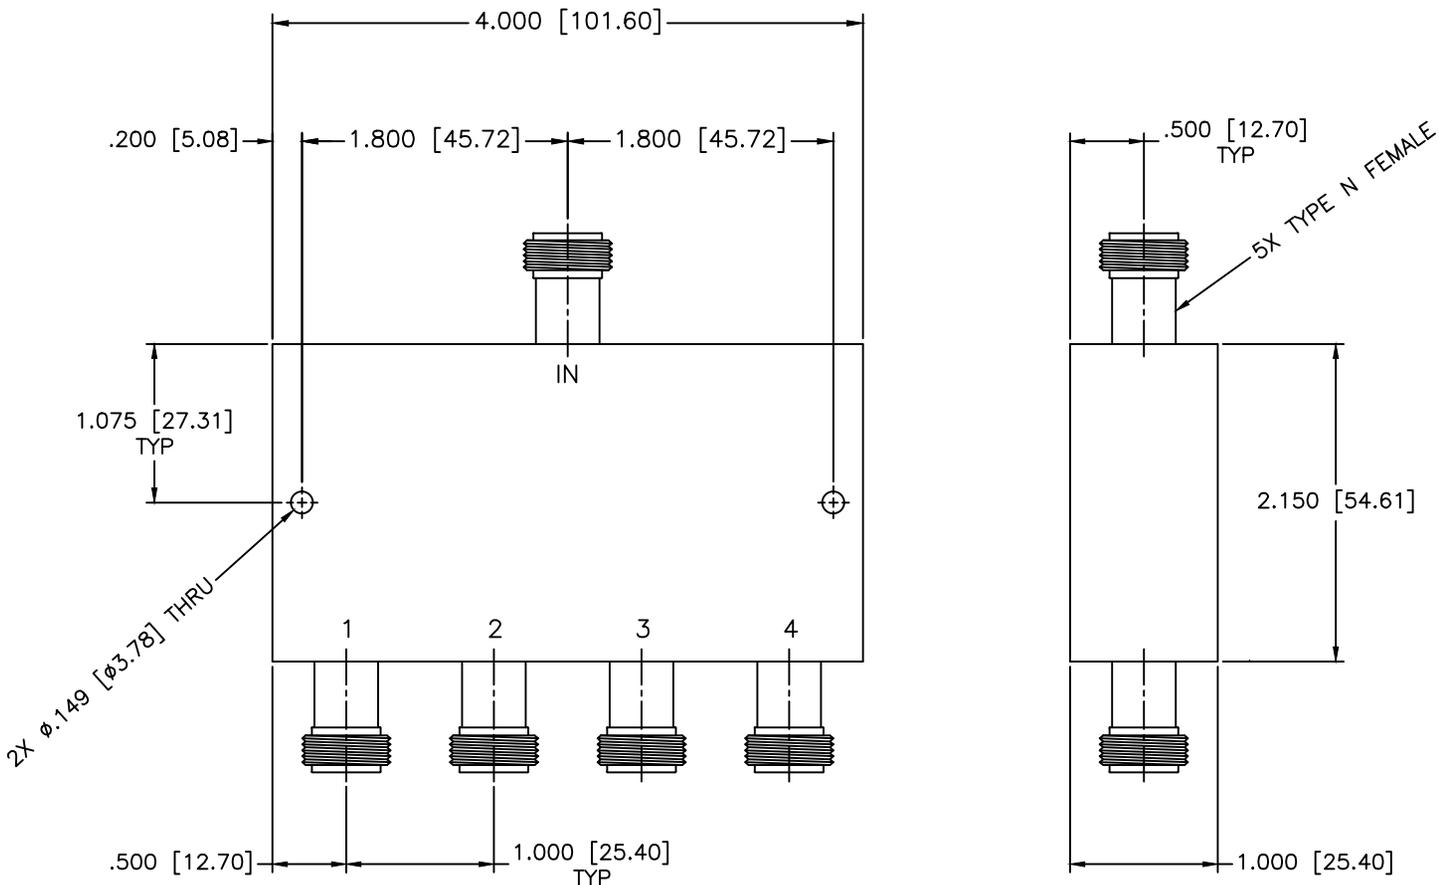

SPECIFICATIONS

Frequency Range: 0.01–60 MHz
 Isolation: 20dB Min.
 VSWR: 1.30:1 Max.
 Insertion Loss: 0.8dB Max.
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±2 Deg. Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 07-26-2018
APPROVED: T. Nguyen	DATE: 07-26-2018

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°	SHEET: N/A
DRAWING TITLE: 4-WAY POWER DIVIDER		
PART NO. PL4-32/NF		
CAGE CODE: OD2L5	SIZE: N/A	REV: N/A
THIRD ANGLE PROJECTION		DWG NO. 86771
DO NOT SCALE THE DRAWING		