


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

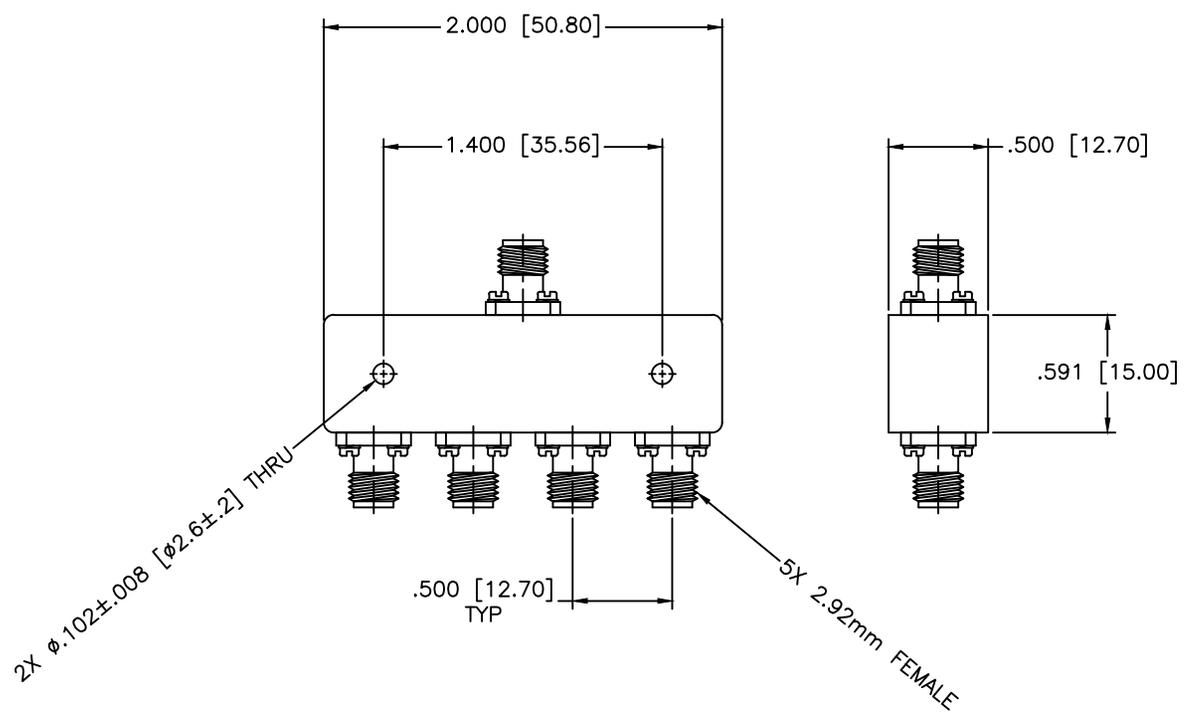

SPECIFICATIONS

Frequency Range: DC–40000 MHz
 VSWR: 2.00:1 Max.
 Insertion Loss: 16.8dB Max.
 Power Handling: 1 Watt
 Amplitude Balance: ±1.0dB Max.
 Operating Temperature: –40°C to +85°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.04 ±.019 ANGLE: ±1/2°		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 03-21-2023	DRAWING TITLE: 4-WAY POWER DIVIDERS		
APPROVED: T. Nguyen		DATE: 03-21-2023	PART NO. PL4-33		
THIRD ANGLE PROJECTION		CAGE CODE: 0D2L5	SIZE: N/A	REV: N/A	DWG NO. 86989
			DO NOT SCALE THE DRAWING		