


4 3 2 1

D  
C  
B  
A

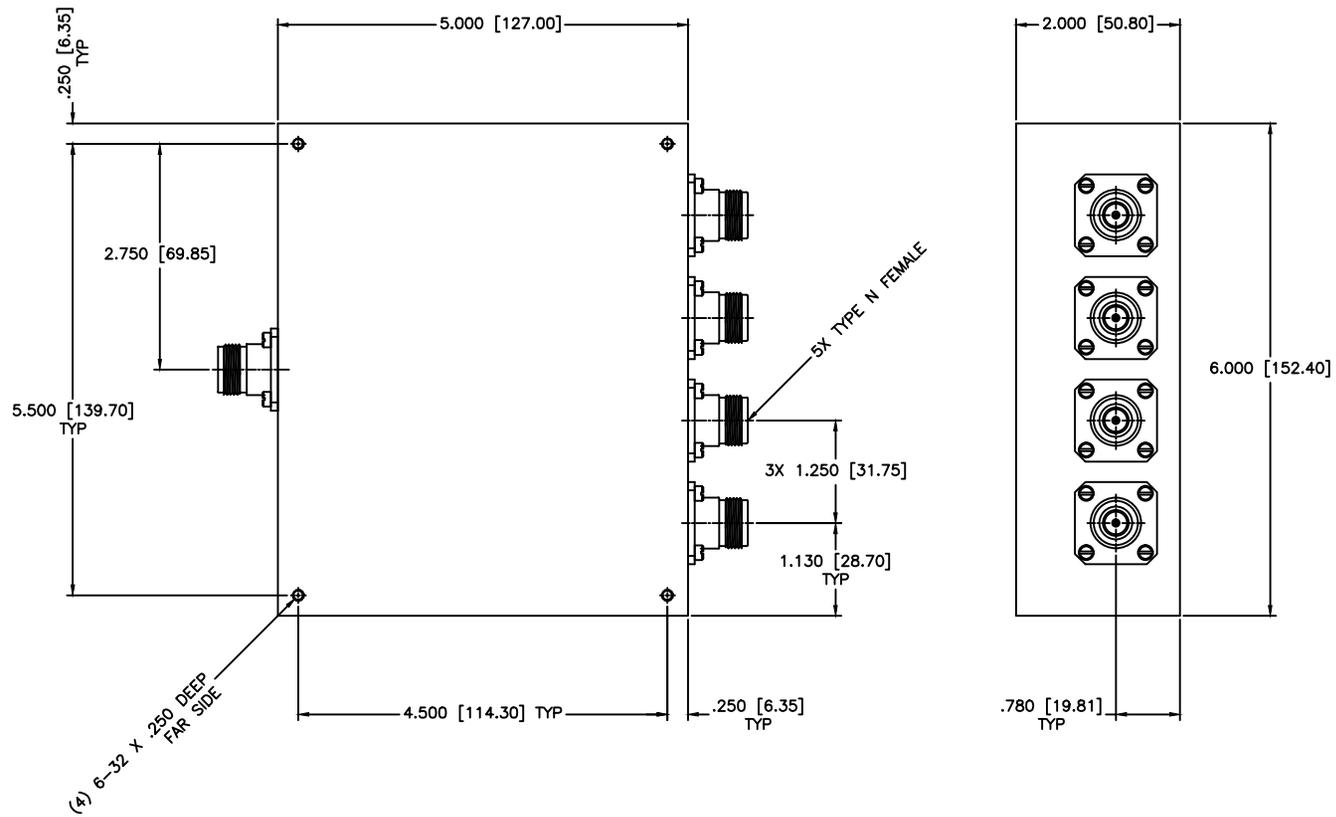

**SPECIFICATIONS**

Frequency Range: 0.1–15 MHz  
 Insertion Loss: 0.3dB Max.  
 Isolation: 20dB Min.  
 Power: 100W CW  
 Amplitude Balance:  $\pm 0.15$ dB Max.  
 VSWR: 1.30:1 Max.  
 Phase Balance:  $\pm 5$  Deg Max.

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
DRAWING TITLE:				SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		4-WAY POWER DIVIDER/COMBINER		
PART NO.:		PLH4-40		
DRAWN: Paiboon Luekhamhan DATE: 07-29-2015	APPROVED: T. Nguyen DATE: 07-29-2015	CAGE CODE: OD2L5 SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING	DWG NO.: 86583	

4 3 2 1