


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

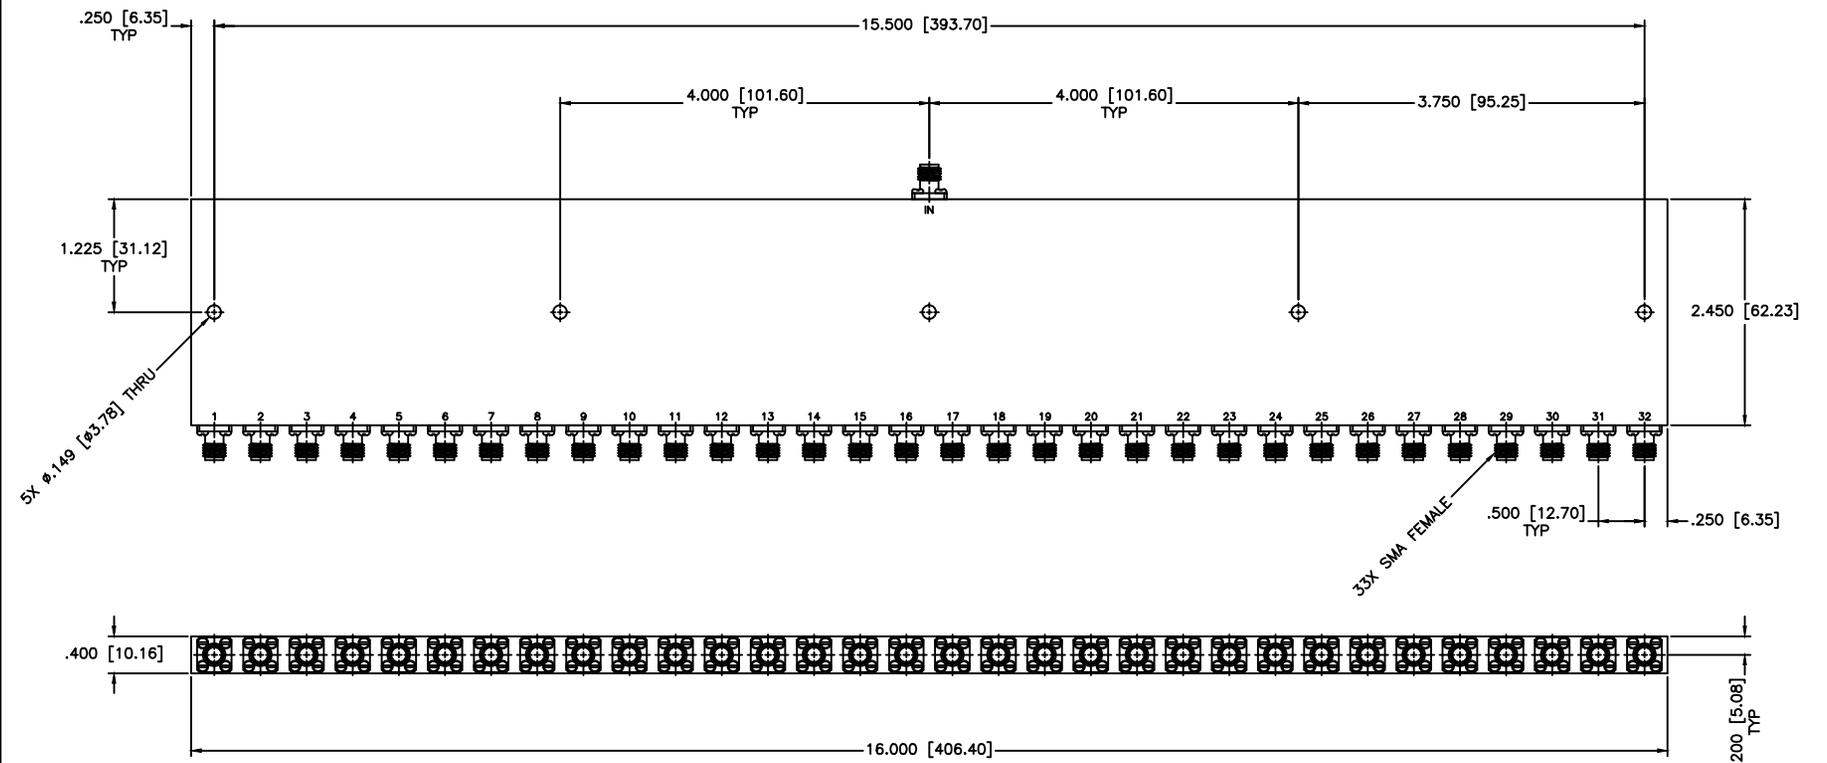

SPECIFICATIONS

Frequency Range: 5–18 GHz
 Insertion Loss: 5.8dB Max.
 Isolation: 12dB Min.
 Power Handling: 20 Watts Max.
 VSWR: 1.90:1 Max.
 Amplitude Balance: ±1.2dB Max.
 Phase Balance: ±12 Deg. Max.

MATERIAL:		 MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°	DRAWING TITLE: 32-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 04-09-2012	PART NO. PS32-10	
APPROVED: T. Nguyen		DATE: 04-09-2012	CAGE CODE: OD2L5	SIZE: C REV: N/A DNG NO. 86069
		THIRD ANGLE PROJECTION	DO NOT SCALE THE DRAWING	