


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

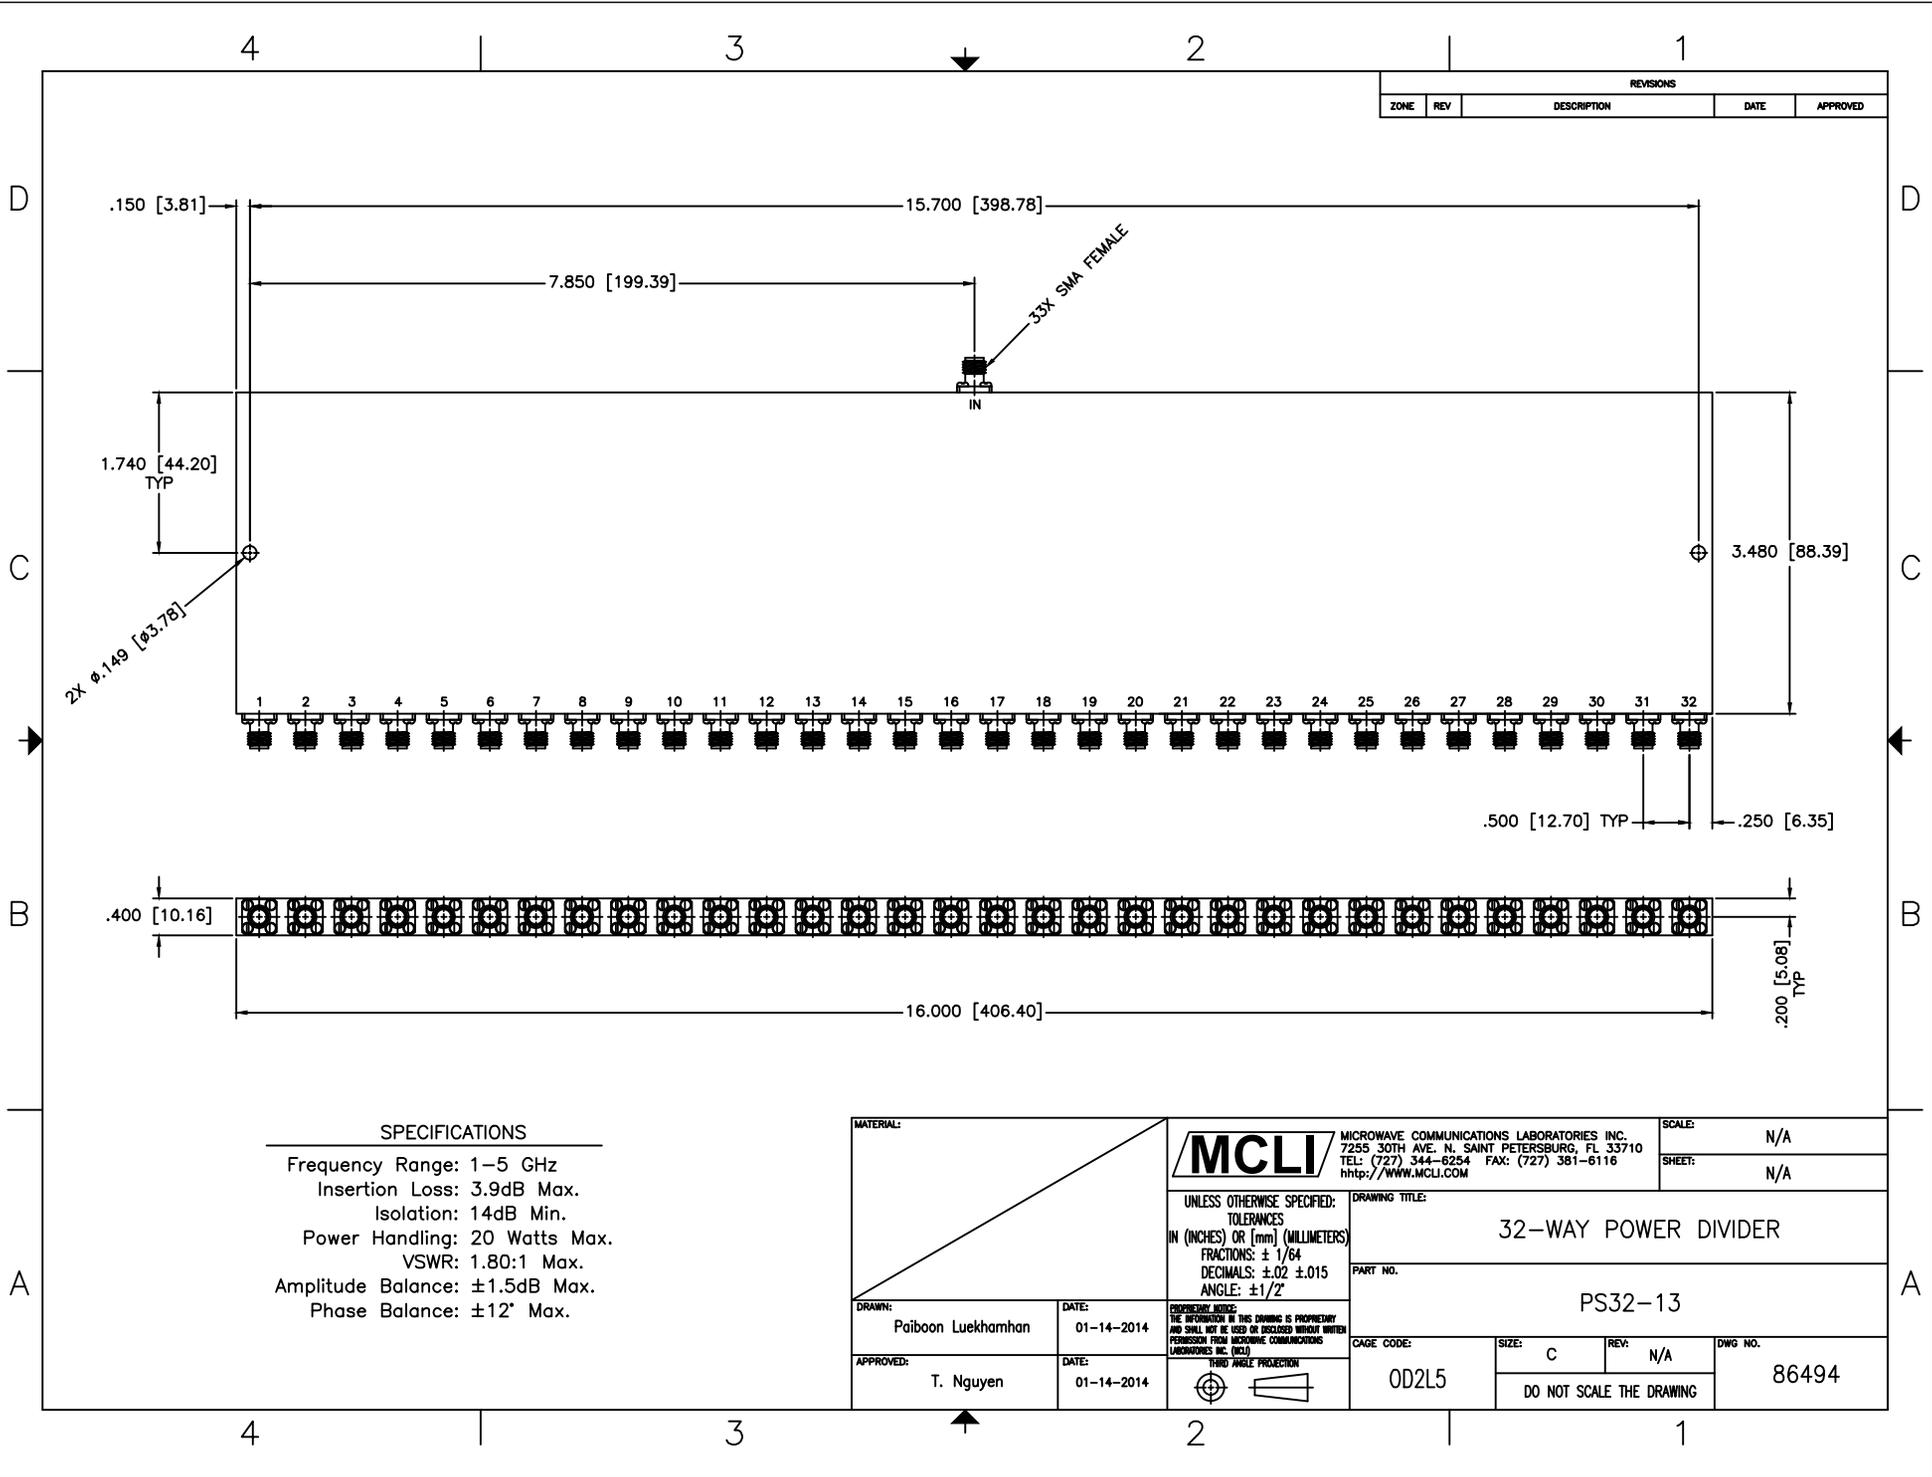

**SPECIFICATIONS**

Frequency Range: 1–5 GHz  
 Insertion Loss: 3.9dB Max.  
 Isolation: 14dB Min.  
 Power Handling: 20 Watts Max.  
 VSWR: 1.80:1 Max.  
 Amplitude Balance: ±1.5dB Max.  
 Phase Balance: ±12° Max.

MATERIAL:		 <b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.015 ANGLE: ±1/2°	DRAWING TITLE: <b>32-WAY POWER DIVIDER</b>	
DRAWN: Paiboon Luekhamhan		DATE: 01-14-2014	PART NO. <b>PS32-13</b>	
APPROVED: T. Nguyen		DATE: 01-14-2014	CAGE CODE: OD2L5	SIZE: C REV: N/A DNG NO. 86494
		THIRD ANGLE PROJECTION	DO NOT SCALE THE DRAWING	