


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

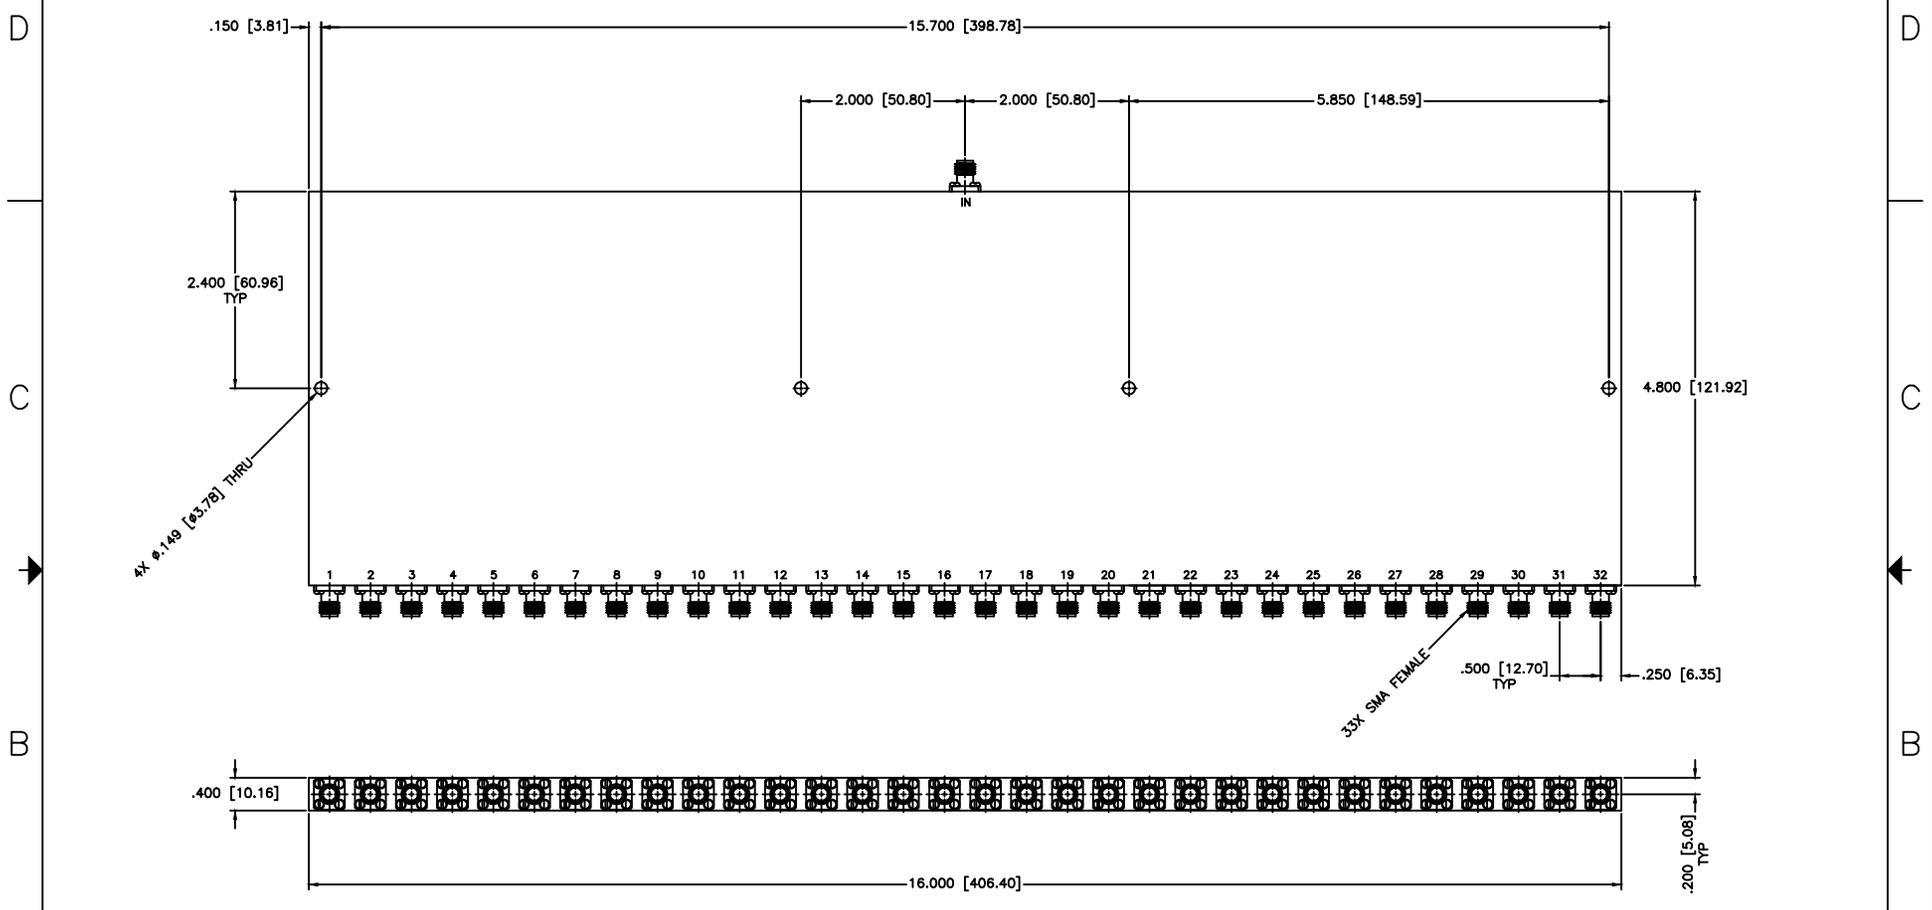

SPECIFICATIONS

Frequency Range: 0.8–2.2 GHz
 Insertion Loss: 5.2dB Max.
 Isolation: 19dB Min.
 Power Handling: 20 Watts Max.
 VSWR: 1.30:1 Max.
 Amplitude Balance: ±1.0dB Max.
 Phase Balance: ±6° Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.015 ANGLE: ±1/2°			DRAWING TITLE: 32-WAY POWER DIVIDER		SHEET: N/A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: PS32-25		CAGE CODE: OD2L5	
DRAWN: Paiboon Luekhamhan	DATE: 11-05-2010	SIZE: C	REV: N/A	DWG. NO.: 86493	
APPROVED: T. Nguyen	DATE: 11-05-2010	DO NOT SCALE THE DRAWING			