


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

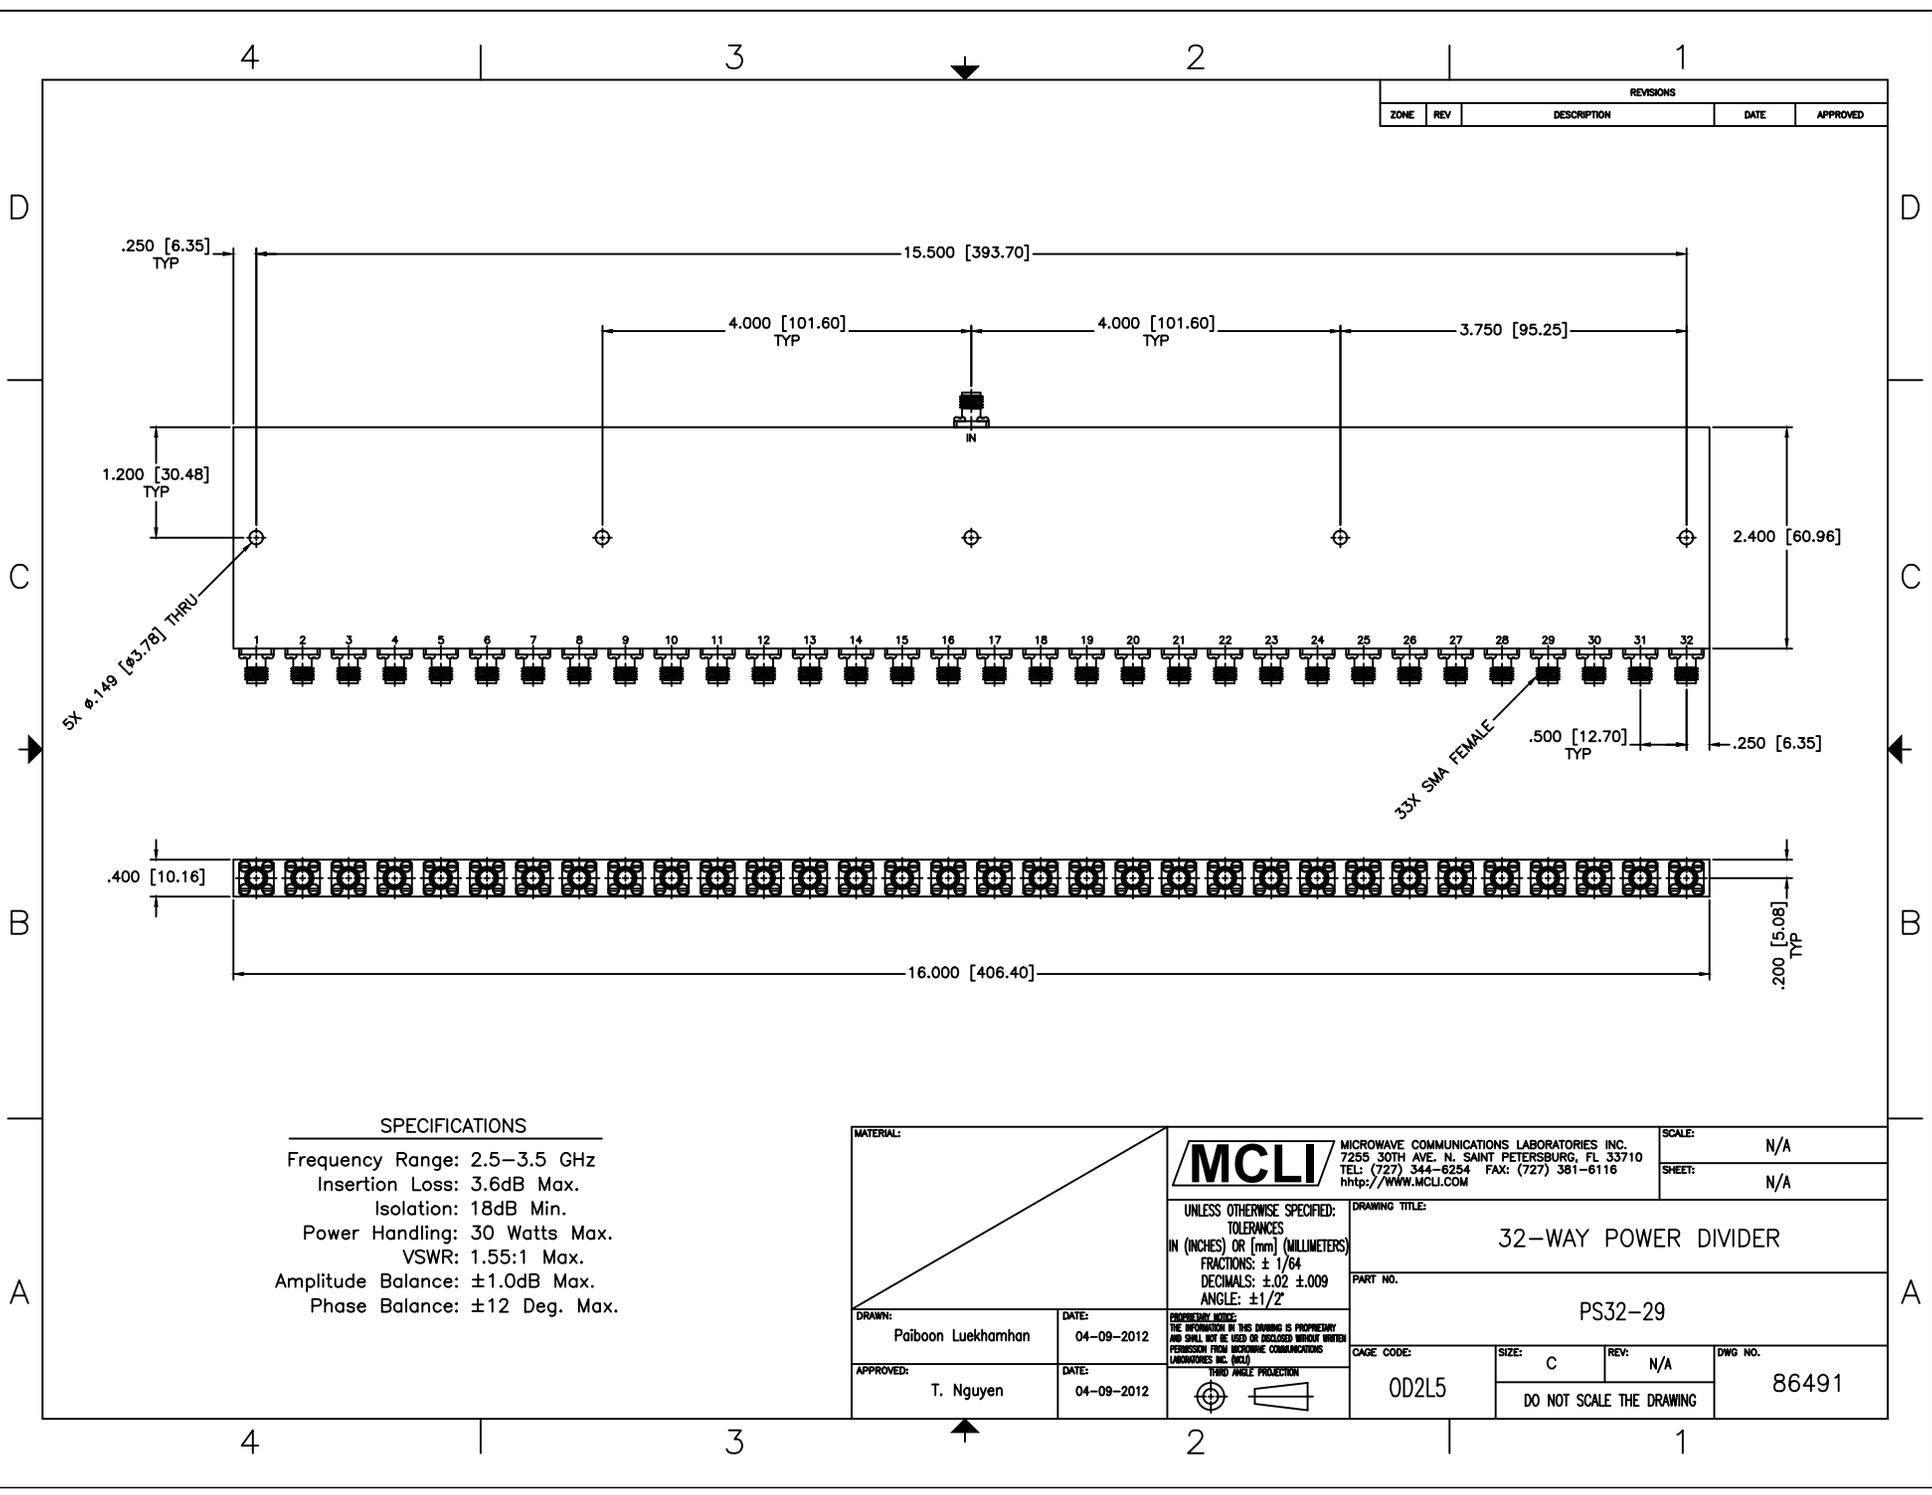

SPECIFICATIONS

Frequency Range: 2.5–3.5 GHz
 Insertion Loss: 3.6dB Max.
 Isolation: 18dB Min.
 Power Handling: 30 Watts Max.
 VSWR: 1.55:1 Max.
 Amplitude Balance: ±1.0dB Max.
 Phase Balance: ±12 Deg. Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°			DRAWING TITLE: 32-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 04-09-2012	PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: PS32-29
APPROVED: T. Nguyen		DATE: 04-09-2012	CAGE CODE: OD2L5	SIZE: C	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO.: 86491	