


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

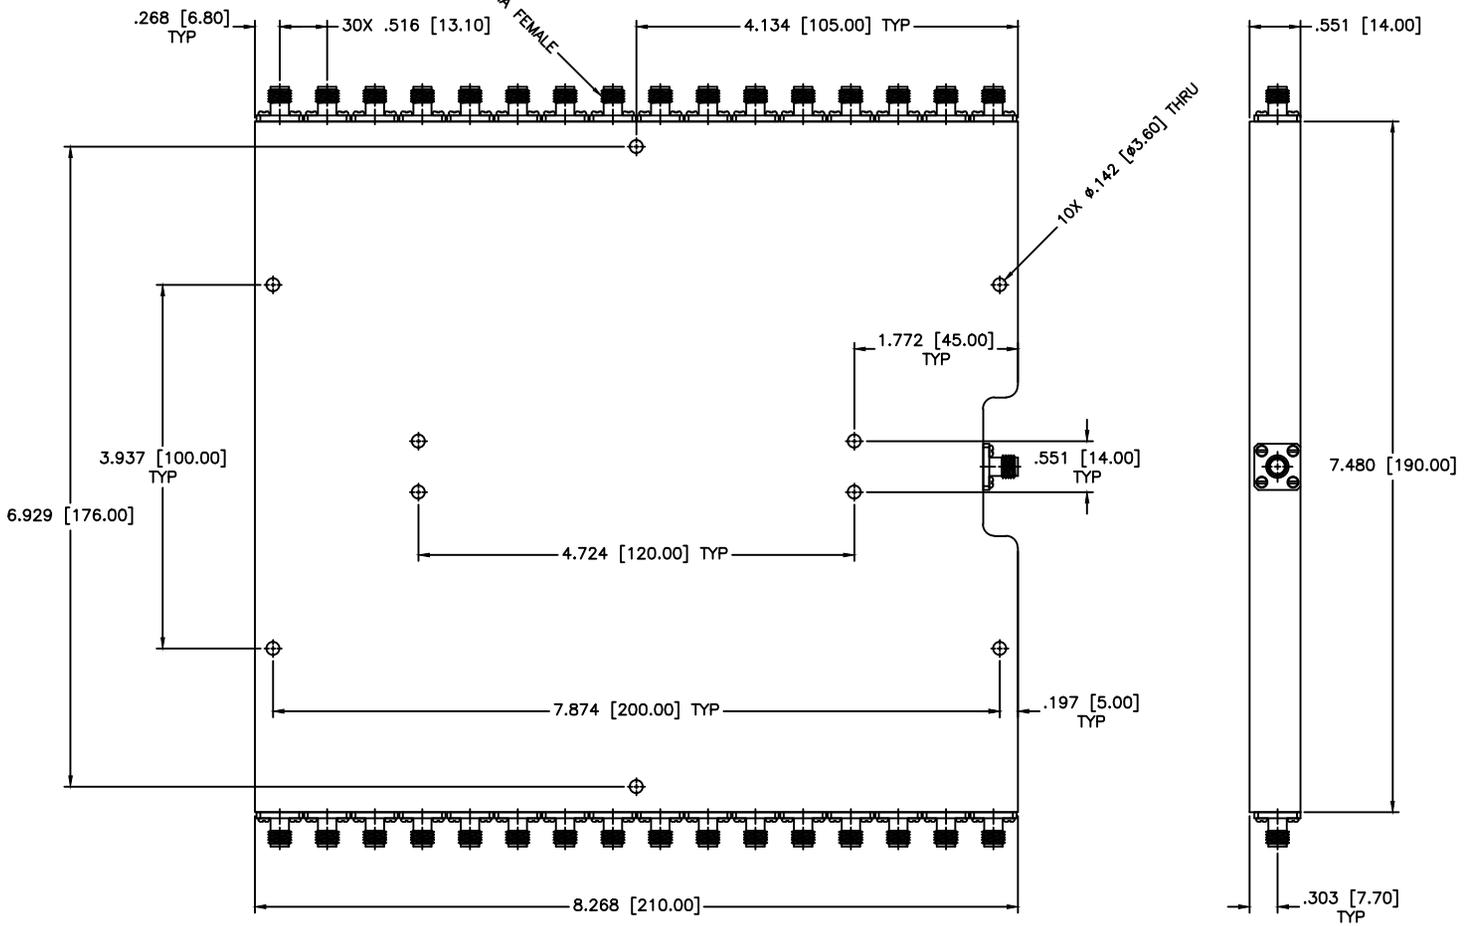

SPECIFICATIONS

Frequency Range: 2-4 GHz
 Insertion Loss: 2.8dB Max.
 Isolation: 16dB Min.
 CW Power: 20W Max. Peak 3kW
 VSWR: 1.50:1 Max.
 Amplitude Balance: ± 0.5 dB Max.
 Phase Balance: ± 5 Deg. Max.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 01-09-2018
APPROVED: T. Nguyen	DATE: 01-09-2018

MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: $\pm 1/64$
 DECIMALS: $\pm 0.02 \pm 0.009$
 ANGLE: $\pm 1/2^\circ$

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

SCALE:	N/A
SHEET:	N/A
DRAWING TITLE: 32-WAY POWER DIVIDER	
PART NO.: PS32-5-T	
CAGE CODE: OD2L5	SIZE: C
REV: N/A	DWG NO.: 86710
DO NOT SCALE THE DRAWING	