


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

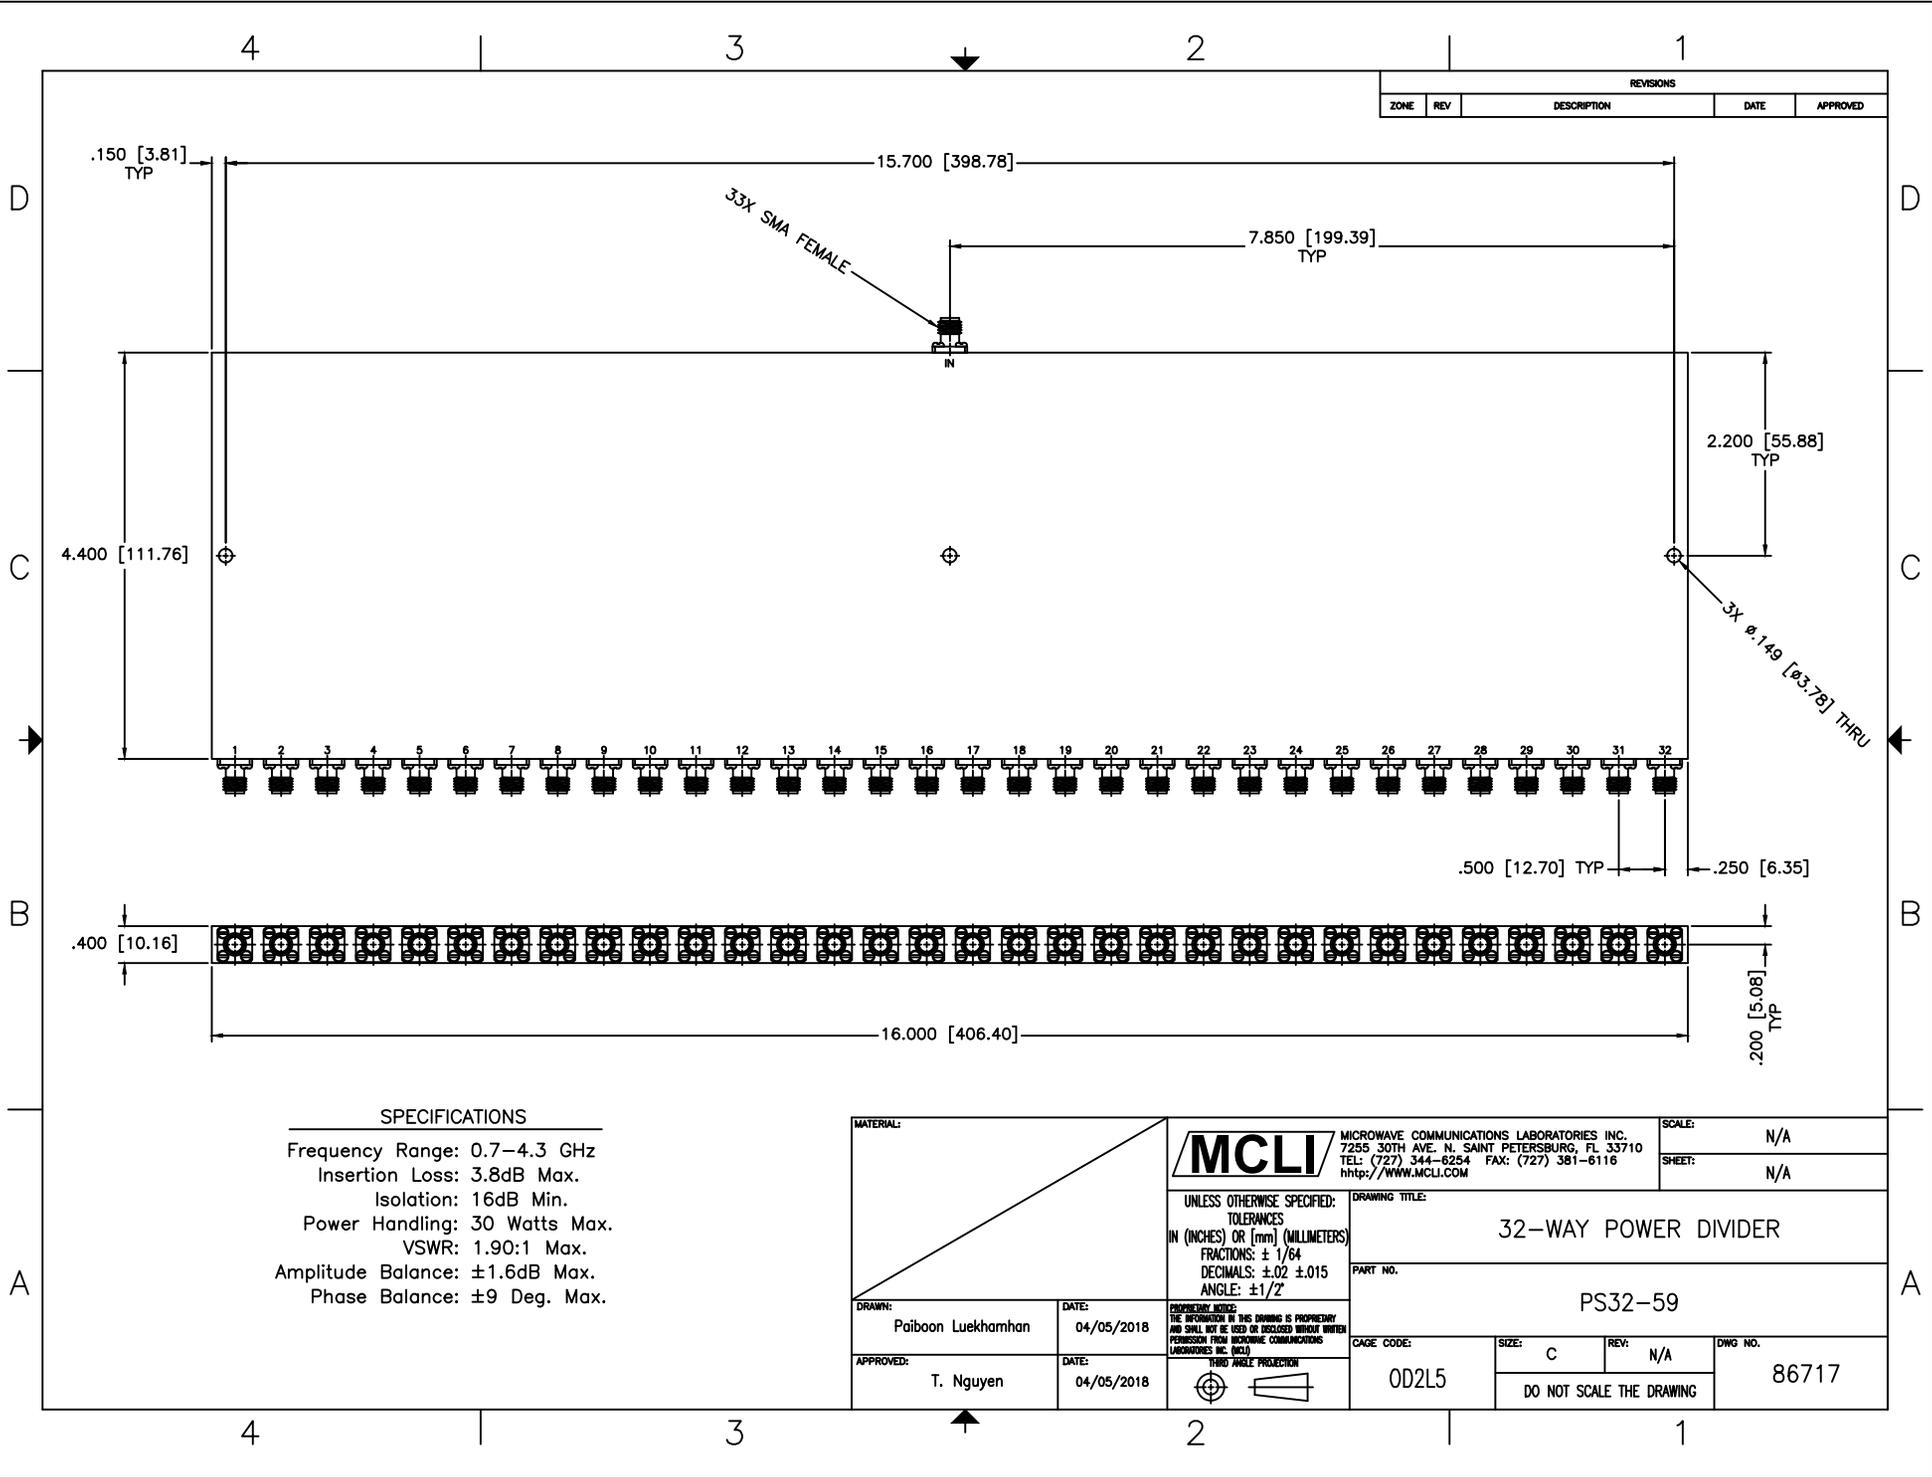

**SPECIFICATIONS**

Frequency Range: 0.7–4.3 GHz  
 Insertion Loss: 3.8dB Max.  
 Isolation: 16dB Min.  
 Power Handling: 30 Watts Max.  
 VSWR: 1.90:1 Max.  
 Amplitude Balance: ±1.6dB Max.  
 Phase Balance: ±9 Deg. Max.

MATERIAL:		 <b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.015 ANGLE: ±1/2°	DRAWING TITLE: <b>32-WAY POWER DIVIDER</b>	
		PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: <b>PS32-59</b>	
DRAWN: Paiboon Luekhamhan	DATE: 04/05/2018	 THIRD ANGLE PROJECTION	CAGE CODE:	0D2L5
APPROVED: T. Nguyen	DATE: 04/05/2018		SIZE:	C
			REV:	N/A
			DWG NO.:	86717
			DO NOT SCALE THE DRAWING	