


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

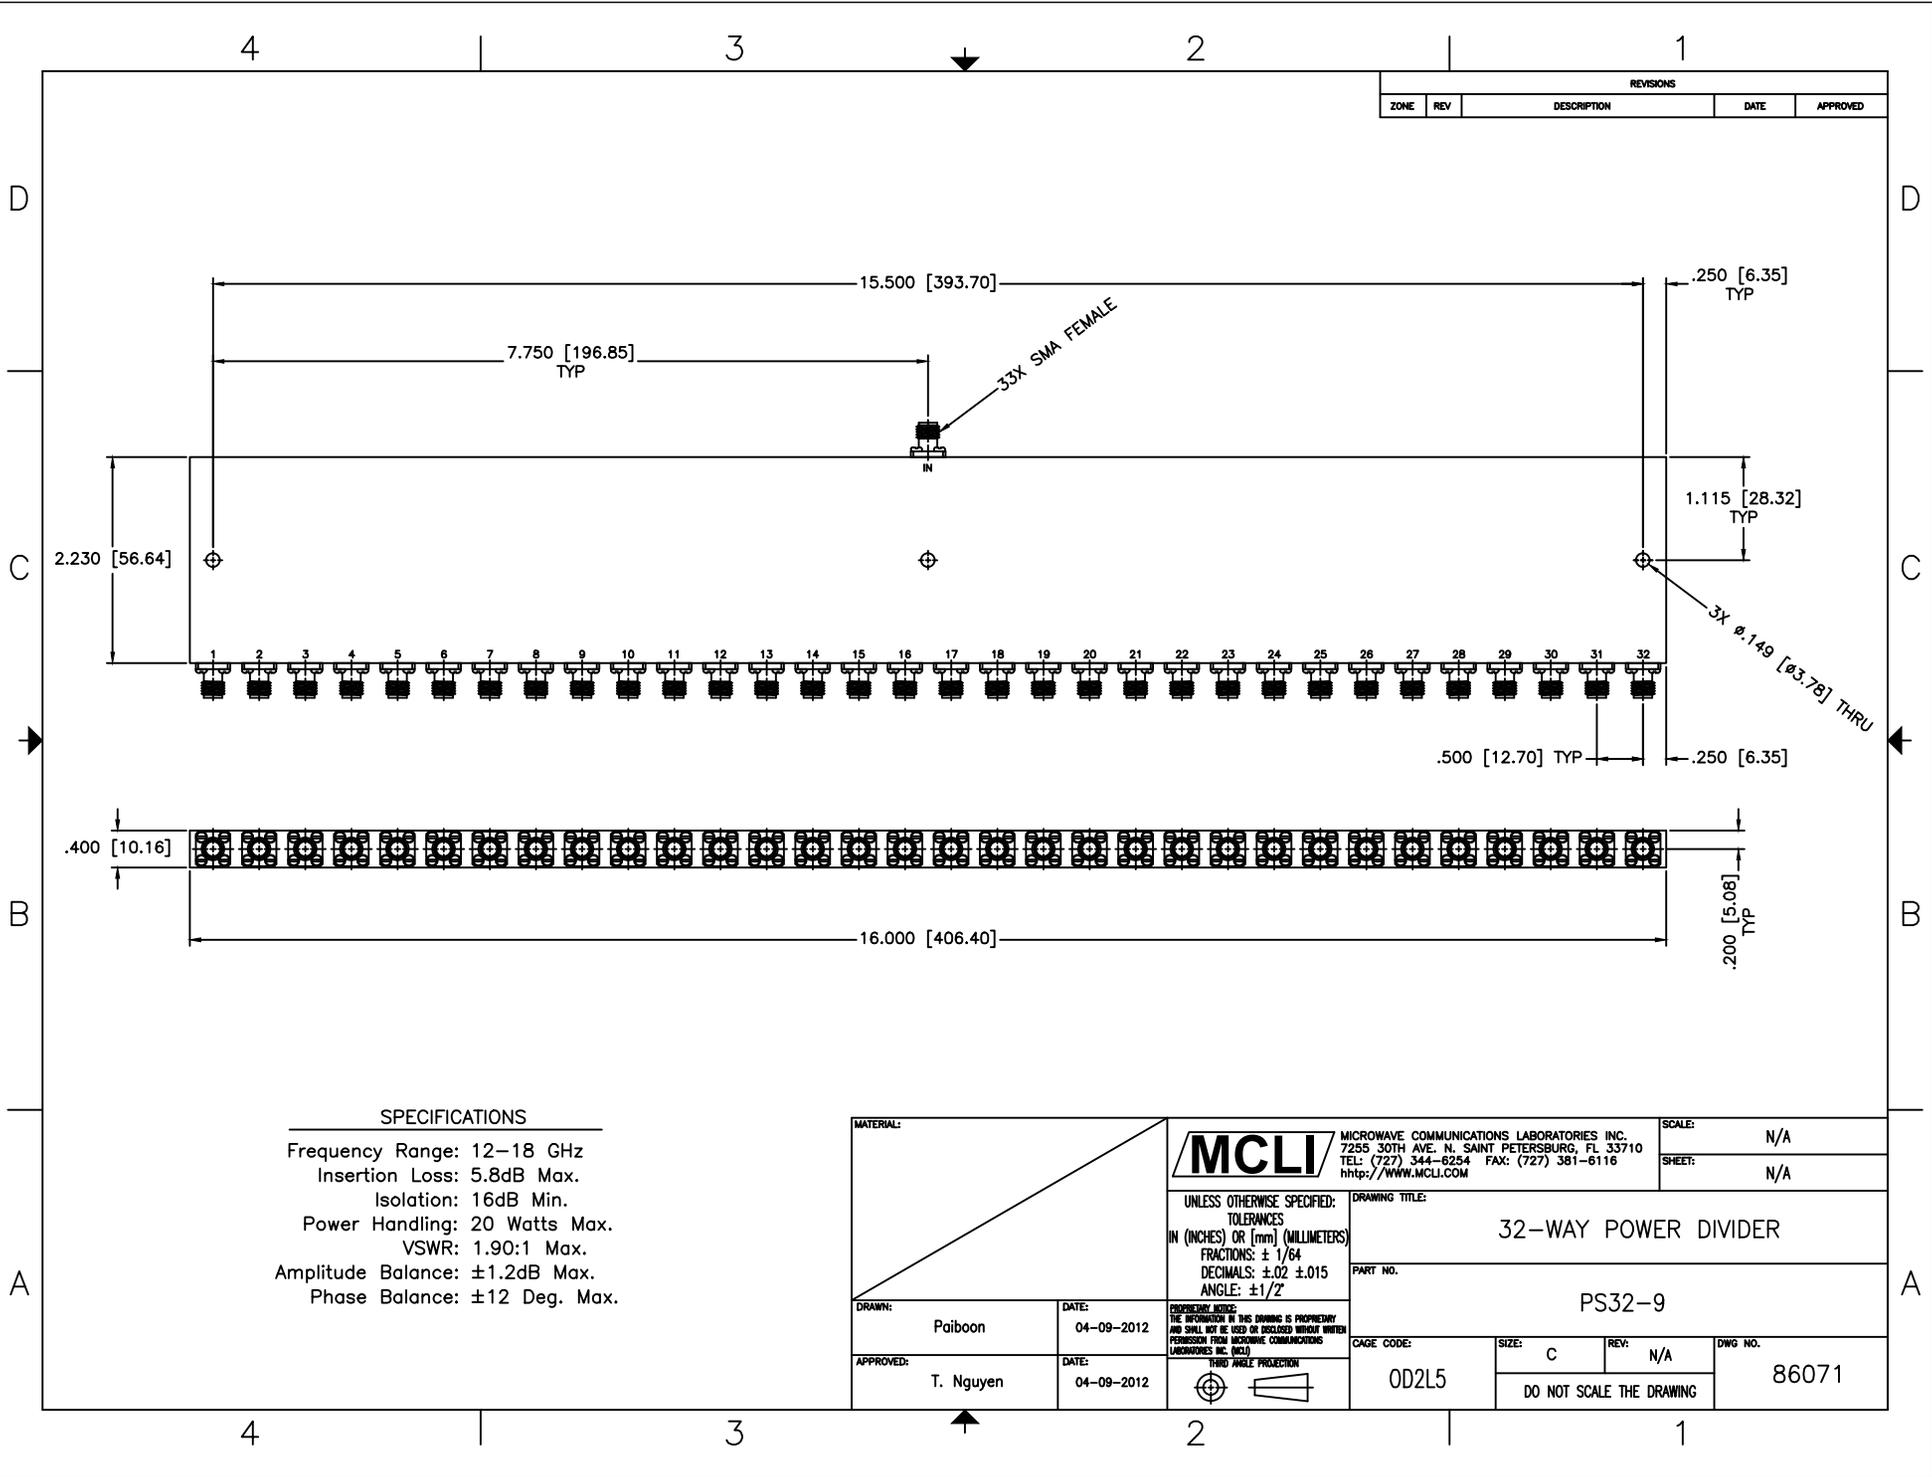

**SPECIFICATIONS**

Frequency Range: 12–18 GHz  
 Insertion Loss: 5.8dB Max.  
 Isolation: 16dB Min.  
 Power Handling: 20 Watts Max.  
 VSWR: 1.90:1 Max.  
 Amplitude Balance: ±1.2dB Max.  
 Phase Balance: ±12 Deg. Max.

MATERIAL:		 <b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A			
			SHEET:	N/A			
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.015 ANGLE: ±1/2°	DRAWING TITLE: <b>32-WAY POWER DIVIDER</b>				
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO.: <b>PS32-9</b>				
DRAWN: Paiboon	DATE: 04-09-2012	 THIRD ANGLE PROJECTION	CAGE CODE:	OD2L5			
APPROVED: T. Nguyen	DATE: 04-09-2012		SIZE:	C	REV:	N/A	DWG NO.:
				DO NOT SCALE THE DRAWING			