


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

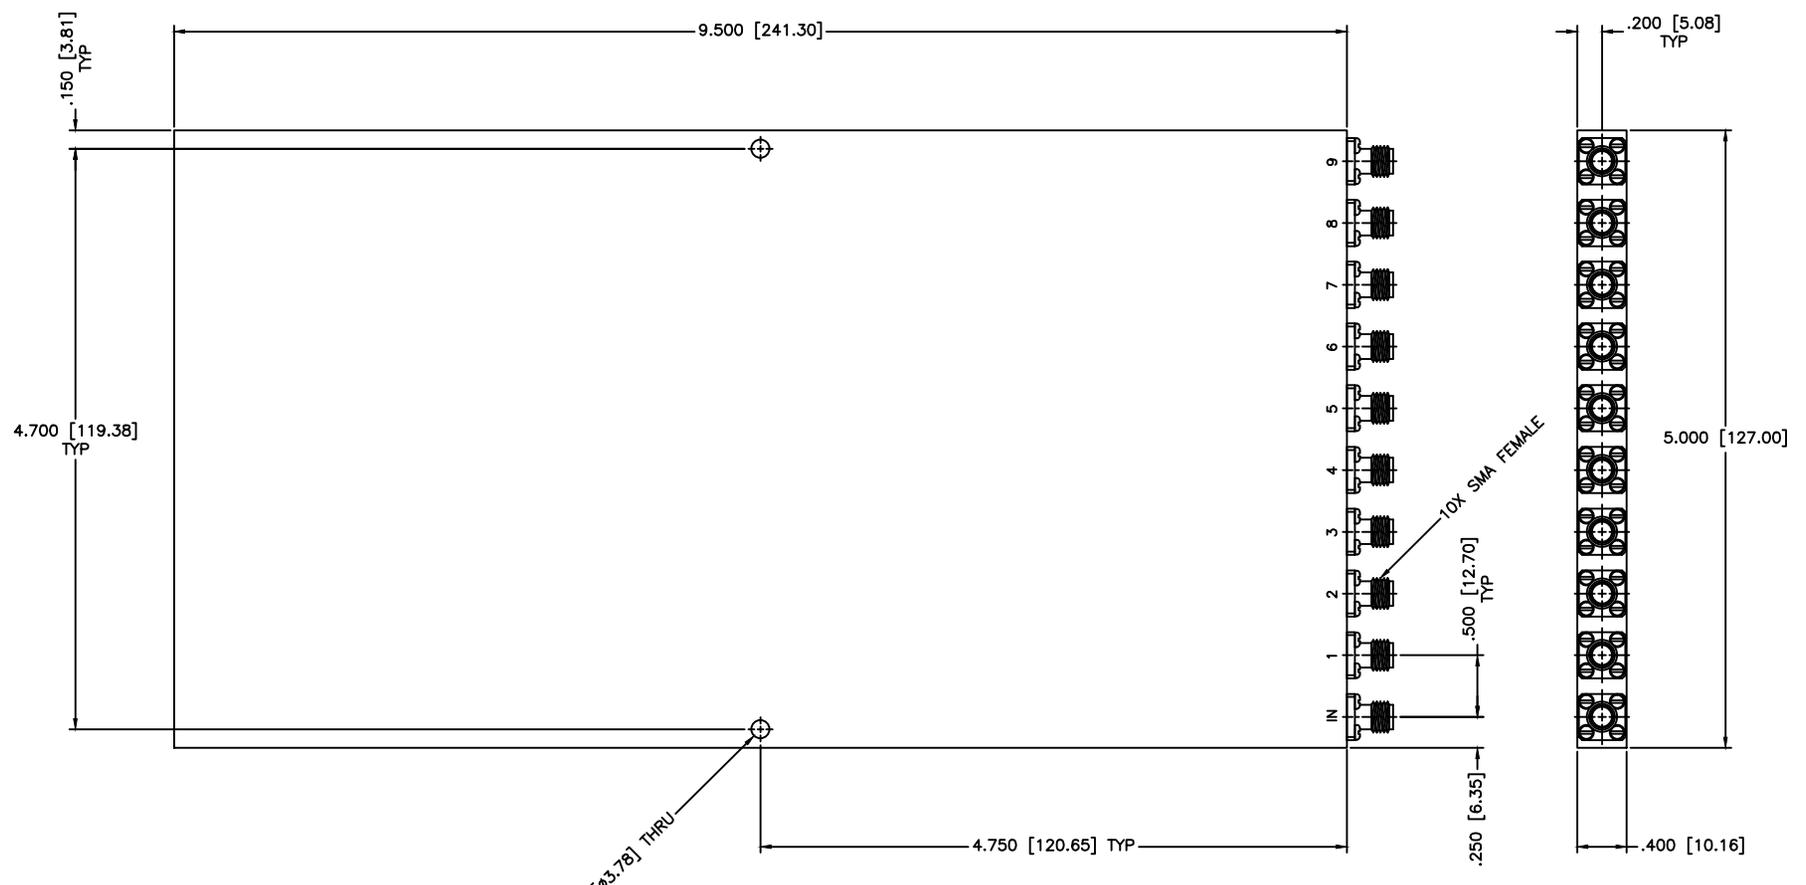

**SPECIFICATIONS**

Frequency Range: 0.5–2.0 GHz  
 Insertion Loss: 2.0dB Max.  
 Isolation: 16dB Min.  
 VSWR: 1.90:1 Max.  
 Amplitude Balance: ±0.9dB  
 Power: 20W (Load vswr@1.2)

2x Ø.149 [Ø3.78] THRU

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: <b>9-WAY POWER DIVIDER</b>		
DRAWN: Paiboon Luekhamhan		PART NO. <b>PS9-11/S</b>		
DATE: 04-18-18		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 04-18-18		DWG NO. 86720
THIRD ANGLE PROJECTION		SIZE: N/A REV: N/A DO NOT SCALE THE DRAWING		

PROPERTY NOTICE:  
THE INFORMATION IN THIS DRAWING IS PROPRIETARY  
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN  
PERMISSION FROM MICROWAVE COMMUNICATIONS  
LABORATORIES INC. (MCLI)

